

Asymmetric double quantum dots as a subminiature mesoscopic cell

Qing-feng Sun¹, Jian Wang², Tsung-han Lin¹

¹State Key Laboratory for Mesoscopic Physics and
Department of Physics,

Peking University, Beijing 100871, China

² Department of Physics, The University of Hong Kong, Pokfulam Road,
Hong Kong, China

()

A subminiature mesoscopic cell, consisting of an asymmetric double quantum dot capacitively coupled to a nearby mesoscopic circuit, is proposed, which can transform disordered noise energy to ordered electric energy. Two schemes, the noise originating from the nearby mesoscopic circuit and from the electromagnetic wave disturbance in external environment, are investigated. We found that the proposed cell can manifest as a good constant current source and the output current may not reach its largest value even if the circuit is shorted.

PACS numbers: 73.40.Gk, 73.50.Lw, 73.50.Td

Mesoscopic physics, a new branch of condensed matter physics, has been developed and become an active field in the last two decades, not only because of the fundamental physics, but also because of the great potential as regards the new generation of electronic and photonic devices.¹ Very recently, by using inelastic transitions in a tunable two-level system,² Aguado and Kouwenhoven proposed a detector of high-frequency quantum noise.³ This detector consists of a double quantum dot which is capacitively coupled to a nearby mesoscopic conductor. Then from the inelastic current through the double quantum dots, one can measure the noise spectrum in the nearby conductor.

Noise always exists in the electronic systems, whether Johnson-Nyquist noise in equilibrium states or shot noise in non-equilibrium states, and has been investigated extensively.⁴⁻⁶ In addition, a system usually exists in an electromagnetic environment from that the noise can also be induced in the system from the electromagnetic wave (EMW) disturbance of the environment.

In this letter, we propose a subminiature mesoscopic cell, consisting of an asymmetric double quantum dot (DQD) and a noise offering circuit, capacitively coupled to a nearby mesoscopic circuit via capacitors C_c (Fig.1(b)), by which one can obtain the useful ordered energy from the disordered noise energy. In the proposed structure, the asymmetric DQD is described as a system of three tunnel barriers (See Fig.1(a)) with capacitances C . Z_a is the impedance of the appliance load. In this model, the current noise S_I of the noise offering circuit will give rise to the fluctuation of the electric potential of the two quantum dot,³ following the intro-dot energy levels E_L and E_R fluctuate too. This leads that the electron in the level E_R of the right dot maybe absorb a quanta from the noise offering circuit and jump to the level E_L

of the left dot (see Fig.1(a)). Therefore, a inelastic current goes through the DQD system from the right side to the left side. We emphasize that no battery exists in this device, but the system can produce ordered current, in other words, the system play a role of electric cell. Specifically, we consider that: (1) Each dot of the DQD has only one electronic level, E_L for the left dot and E_R for the right dot, respectively. (2) The DQD is designed asymmetric to make the two levels E_L and E_R not in line. Notice that no gate voltage applied in this DQD for controlling the intra-dot levels, different from the cases in Ref. 7,8. (3) $E_L < \mu_L, \mu_R < E_R$, where μ_α is the chemical potential, so that the level E_L is almost empty and the level E_R is almost occupied by the electron. (4) $\Delta E \equiv E_L - E_R \gg T_c$ with T_c the coupling between two dots.³ Then the coherent tunneling between the two dots can be neglected,⁹ while the incoherent tunneling dominants, in which the photon emission or absorption to or from the environment may happen. (5) Let Γ_L and Γ_R denote the tunneling rates through the left and right barriers, and $\Gamma_i(\epsilon)$ the inelastic transition rate through the middle barrier. Here we consider the situation with $\Gamma_i \ll \Gamma_L, \Gamma_R$, i.e., the middle barrier is much larger than left and right barriers. Then the inelastic current through the DQD system (from the right side to the left side) is mainly decided by $\Gamma_i(\epsilon)$.³ From perturbation theory, one can obtain this inelastic current as:^{10,11}

$$I(\Delta E) = \frac{e}{\hbar} \Gamma_i(\Delta E) f_L(E_L) [1 - f_R(E_R)] - \frac{e}{\hbar} \Gamma_i(-\Delta E) f_R(E_R) [1 - f_L(E_L)], \quad (1)$$

where $f_{L/R}(\epsilon) = \{e^{(\epsilon - \mu_{L/R})/k_B T_D} + 1\}^{-1}$ is the Fermi distribution function in the left/right lead, T_D is the temperature of DQD's system. Here $\Gamma_i(\epsilon)$ is related to the coupling strength T_c by $\Gamma_i(\epsilon) = T_c^2 P(\epsilon)$ ³ and the probability $P(\epsilon)$ for the exchange of energy quanta with the environment is given (at $\epsilon \neq 0$):³ $P(\epsilon) = \frac{2\pi}{R_K} |Z(\omega)|^2 S_I(\omega) / \epsilon^2$, $S_I(\omega)$ is the current noise spectrum at frequency ω ($\omega = \epsilon/\hbar$) in the mesoscopic device, $R_K = h/e^2 \approx 25.8k\Omega$ is the quantum resistance. $Z(\omega)$ is the trans-impedance connecting the DQD system and the noise offering circuit. For the circuit of Fig.1(b), $Z(\omega)$ is:

$$Z(\omega) = \frac{C_x/C}{iC_x\omega + \tilde{Z}_a^{-1} + \tilde{Z}_s^{-1} \left(1 + \frac{iC_x\omega + \tilde{Z}_a^{-1}}{iC_c\omega}\right)}, \quad (2)$$

where $\tilde{Z}_a = Z_a + 1/iC\omega$, $\tilde{Z}_s = Z_s + 1/iC_s\omega$, and $C_x = C(C + C_c)/(2C + C_c)$.

In terms of noise spectrum, the inelastic current through the asymmetric QDQ is:

$$I = \frac{2e\pi T_c^2}{\hbar R_K} \frac{|Z(\Delta E/\hbar)|^2}{\Delta E^2} (g_{LR} - g_{RL}) \quad (3)$$

where $g_{\alpha\beta} = S_I((E_\alpha - E_\beta)/\hbar) f_\alpha(E_\alpha)(1 - f_\beta(E_\beta))$. Notice that the output current of the subminiature mesoscopic cell (i.e. the current through the appliance load Z_a) is equal to the current through the DQD. In the following, we investigate in detail the output current for the two schemes: (i) the noise originates from the equilibrium noise offering circuit itself. (ii) the noise from the EMW disturbance in a nearby external electromagnetic environment.

(i) *the noise from the noise offering circuit.* In this case we assume that the noise offering circuit is not affected by EMW disturbance in the external environment; and the mesoscopic device is a quantum point contact (QPC) in equilibrium. Then the noise spectrum $S_I(\omega)$ can be expressed as:^{12,13} $S_I(\omega) = 4G\hbar\omega/(1 - e^{-\hbar\omega/k_B T_n})$, where G is the conductance, T_n is the temperature of the noise offering circuit (or the QPC's system). In the numerical studies, we take relevant parameters as: (1) $C = 0.05fF$, $C_c = 0.1fF$, $C_s = 1nF$, and $Z_s = 0.5R_K$; which are typical experimental values.³ (2) Let $T_c = \Delta E/100$, so as to satisfy the condition $\Delta E \gg T_c$. (3) Set $E_L = -E_R$ and $\mu_L = -\mu_R$. (4) Let the QPC only has one open channel, leading to $G = 2/R_K$. First, we investigate the case in which the circuit is shorted, i.e. $Z_a = 0$, meanwhile $\mu_L = \mu_R = 0$. The output current I vs. the temperature difference ΔT ($\Delta T \equiv T_n - T_D$) at different T_D is presented in Fig.2(a), showing an almost linear relation. Fig.2(b) shows the output current I vs the energy difference ΔE , exhibiting a non-monotonous variation. In both limits of $\Delta E \rightarrow 0$ and $\Delta E \rightarrow \infty$, I becomes to zero. The position ΔE , at which I has its maximum, is determined by ΔT and T_D . It should be emphasized that I is exactly zero if $\Delta T = 0$, regardless of the values of T_D and ΔE . This result is obviously consistent with the second law of thermodynamics. In fact, one can consider the cell as a heat engine, which works between two heat reservoirs with the temperature T_n and T_D .

(ii) *the noise originates from the EMW disturbance in the nearby environment.* In this case, we can assume that the temperature difference ΔT is zero, and the noise of the EMW disturbance is the only source of the output current I . For simplicity we also assume that the noise spectrum $S_I(\omega)$ from the EMW disturbance is independent with ω , i.e. a white noise, $S_I(\omega) = S_0$. The inset in Fig.2(b) shows the output current I vs. ΔE at the short circuit case. One can clearly see that the output current I is nonzero with the following features: I is zero at $\Delta E = 0$, With the increase of ΔE , the difference of the occupation number becomes larger, leading to a larger current I . Then I reaches its maximum when

ΔE at a certain value (several times of T_n). With the further increase of ΔE , I decreases slowly, because that the transition from E_R to E_L becomes to very difficult at large ΔE . It is merit mentioning that: in order to obtain a greater output current I , one can take different ways as: (1) To lower the temperature of the system, T_n and T_D . (2) To change the noise offering circuit into a LC circuit with the condition of $1/\sqrt{LC} = \Delta E/\hbar$.

Up to now, we have studied the output current I at the short circuit case (i.e. $Z_a = 0$), in which the subminiature mesoscopic cell can produce a current I , but its output power is zero. In the following, we study the case of $Z_a \neq 0$, in which the cell has a nonzero output power. Since in this case, μ_L and μ_R are nonzero, the output current I has to be solved from Eq.(3) and the equation $I Z_a = (\mu_L - \mu_R)/e$. Fig.3(a) shows I vs Z_a for case (i). One finds that: (1) When Z_a varies from 0 to a critical value Z_{ac} , I keeps almost independent with Z_a . This means that this cell is a good constant current source.¹⁴ The critical appliance impedance Z_{ac} is also dependent with ΔE , and is approximately determined by $Z_{ac}I = \Delta E/e$: $Z_{ac} \approx 3k\Omega$ and $Z_{ac} \approx 12k\Omega$ for $\Delta E = 0.2meV$ and $\Delta E = 0.3meV$, respectively. (2) When $Z_a > Z_{ac}$, the output current I drops quickly with the increase of Z_a , quicker than $1/Z_a$.

The efficiency of the subminiature mesoscopic cell, η , is defined as the ratio of the output energy of the cell to the input energy from the high-temperature heat reservoir.¹⁵ Neglecting external losses, one has $\eta = IV\Delta t/(I\Delta E\Delta t/e) = eV/\Delta E$, where $V = (\mu_L - \mu_R)/e$ is the bias voltage across the appliance impedance Z_a . η vs T_n at different Z_a is shown in the inset of Fig.2(a). For comparison, the limit efficiency of heat engine, $(T_n - T_D)/T_n$, is also shown by the dotted curve. The efficiency η monotonously increases with the temperature T_n and the appliance impedance Z_a . Notice that η can never excess $(T_n - T_D)/T_n$, the efficiency of the ideal heat engine by the second law of thermodynamics. But the efficiency η may still be quite high, e.g. at $Z_a = 10k\Omega$ and $T_n = 3K$, $\eta \approx 57\%$; which is close to the limit efficiency of heat engine, 66.7%.

Finally, let us study an interesting result. It is well known that for the ordinary electric cell, the output current I has its largest value if the circuit is shorted. However, for the proposal cell, the output current I may be larger if the circuit is loaded ($Z_a \neq 0$) than the circuit is shorted ($Z_a = 0$). Fig.3(b) shows I vs. Z_a at very low temperature ($T_n = 0.1K$ and $T_D = 0.6K$). It is obvious that I is not the largest at $Z_a = 0$. For example, for $\Delta E = 0.2meV$, the largest current I is at $Z_a \approx 43k\Omega$, is not at $Z_a = 0k\Omega$. Because that the current $I(\Delta E)$ is directly proportional to the modulus square of the trans-impedance, $|Z(\Delta E/\hbar)|^2$, which also depends on Z_a (See Eqs.(2) and (3)). While Z_a increases, $|Z(\Delta E/\hbar)|^2$ increases quickly in a certain range of Z_a , may lead to a larger current I .

In summary, by using an asymmetric double quantum

dots, we propose a subminiature mesoscopic cell, which can change the the disordered noise energy in a nearby mesoscopic device to the useful ordered electrical energy. Two different cases of the origin of the noise are studied. The cell manifests a good constant current source and high efficiency. Moreover, an interesting phenomenon, that the output current may have its largest value for the loaded circuit is discussed, which is important from the point of view of the application.

This work is supported by the research grant from the Chinese National Natural Science Foundation, and the State Key Laboratory for Mesoscopic Physics in Peking University, and a CRCG grant from the University of Hong Kong.

to $T_D = 0.5K$, $1K$, and $3K$, respectively. (b). I vs ΔE at $T_D = 1K$. The dotted, dashed, and solid curves correspond to $\Delta T = 3K$, $2K$, and $1K$, respectively. The inset in (a) shows the efficiency η vs T_n at $T_D = 1K$ and $\Delta E = 0.1meV$. The solid curves 1-3 correspond to $Z_a = 3k\Omega$, $10k\Omega$, and $30k\Omega$, respectively. The dotted curve is $(T_n - T_D)/T_n$ for comparison. The inset in (b) shows the output current I of the short circuit for the case of the noise from the EMW disturbance in nearby environment. The dotted, dashed, and solid curves correspond to $T_n = T_D = 1K$, $2K$, and $3K$, respectively.

Fig. 3 The output current I vs Z_a . The parameters are: (a) $T_D = 0.1K$ and $T_n = 1.5K$; (b) $T_D = 0.1K$ and $T_n = 0.6K$.

-
- ¹ G. Garcia-Calderon, in *The Physics of Low-Dimensional Semiconductor Structures*, edited by P. Butcher *et al.*, Plenum Press, New York, 1993, p.267.
 - ² T. Fujisawa *et al.*, Science **282**, 932 (1998).
 - ³ R. Aguado and L. P. Kouwenhoven, cond-mat/9905283.
 - ⁴ Sh. Kogan, *Electronic noise and fluctuations in solids*, Cambridge University Press 1996.
 - ⁵ M.J.M. de Jong and C.W.J. Beenakker, in *Mesoscopic Electron Transport*, edited by L. L. Sohn *et al.*, (Kluwer, Dordrecht, 1997).
 - ⁶ M. Büttiker, Phys. Rev. Lett. **65**, 2901 (1990).
 - ⁷ Q.-f. Sun *et al.*, Phys. Rev. B **59**, 13126 (1999).
 - ⁸ L. P. Kouwenhoven *et al.* Phys. Rev. Lett. **73**, 3443 (1994).
 - ⁹ T. H. Oosterkamp *et al.*, Nature **395**, 873(1998).
 - ¹⁰ A. J. Legget *et al.*, Rev. Mod. Phys. **59**, 1 (1987).
 - ¹¹ M. H. Devoret *et al.*, Phys. Rev. Lett. **64**, 1824 (1990).
 - ¹² C. W. Gardiner, *Quantum Noise*, (Springer-Verlag) 1991.
 - ¹³ M. Büttiker, Phys. Rev. B **45**, 3807 (1992).
 - ¹⁴ In order that the cell is a constant current source, one has to maintain the constant temperatures T_n and T_D in experiment, which need two heat reservoirs to touch the DQD system and the noise offering circuit.
 - ¹⁵ C. A. Stafford and N. S. Wingreen, Phys. Rev. Lett. **76**, 1916 (1996).

FIGURE CAPTIONS

Fig. 1 (a) Energy diagram of the asymmetric DQD. (b) A schematic structure of the subminiature mesoscopic cell. The symbols marked with "B" in the asymmetric DQD are the three tunnel barriers. Z_a is the appliance impedance.

Fig. 2 The output current I of the short circuit for the case of the noise from the oneself of the noise offering circuit. (a) I vs ΔT at $\Delta E = 0.1meV$. The dotted, dashed, and solid curves correspond

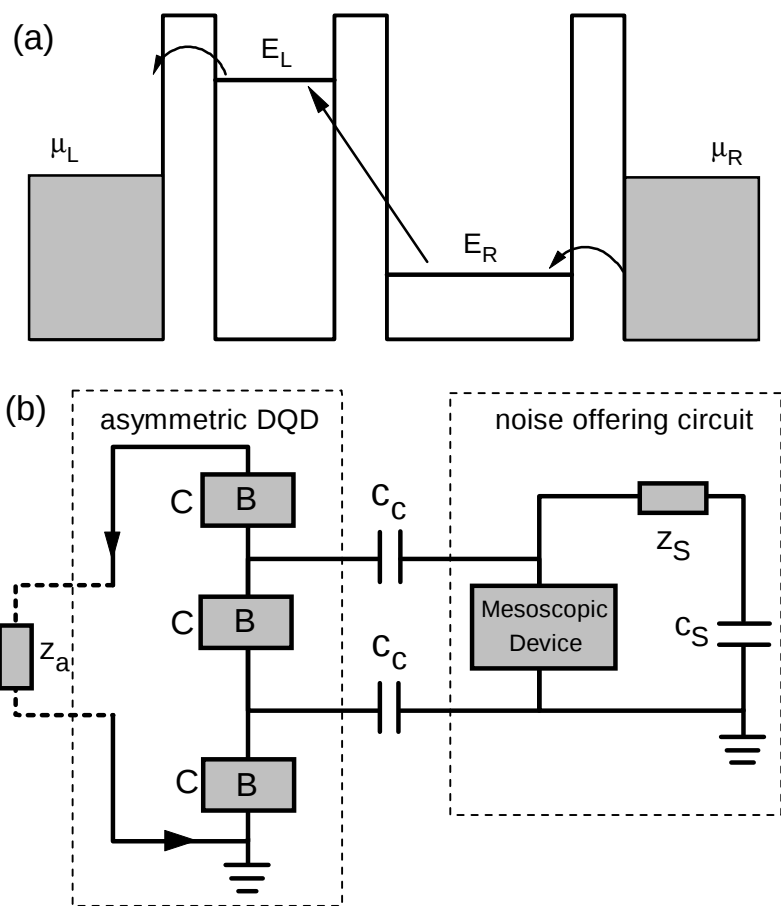


Fig. 1

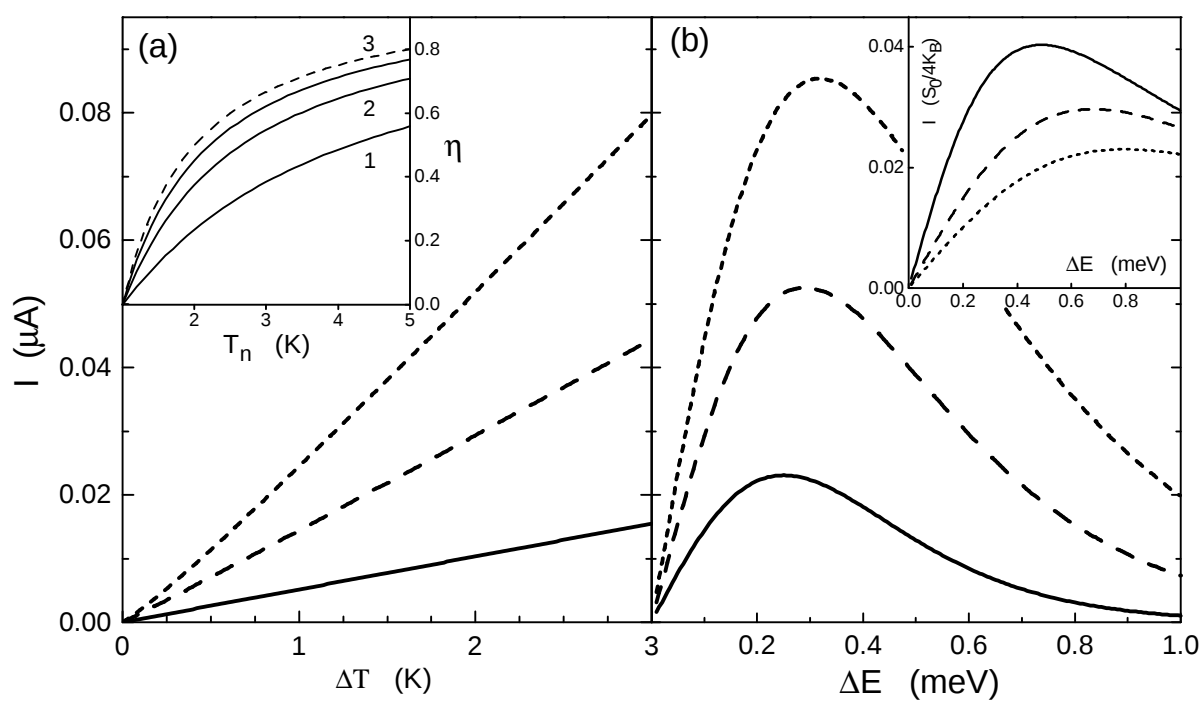


Fig. 2

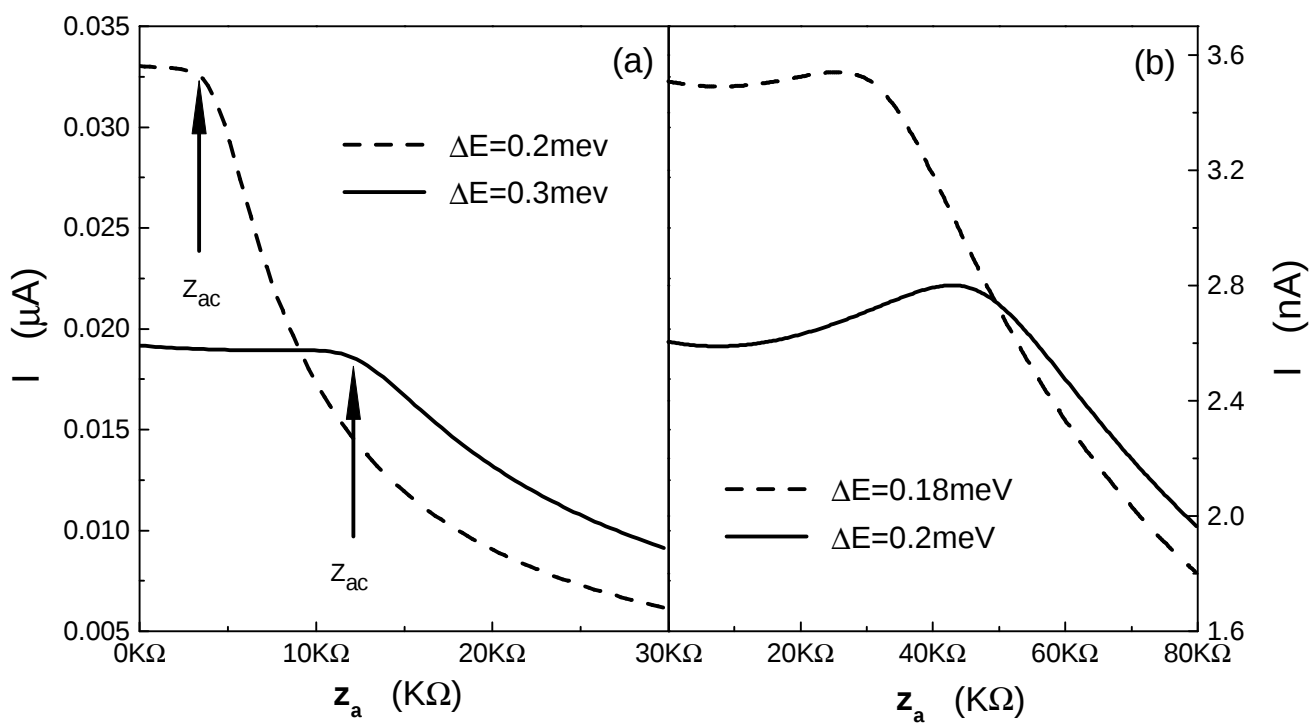


Fig. 3